



**PI 1547**

For technical personnel only!

1/1

# PRODUCT INFORMATION

## FUEL CHECK VALVES

### REVISED RANGE (Ø 6 – 12 MM)

**Motorservice has revised its range of fuel check valves and now also offers fuel check valves with 10 mm and 12 mm connection diameters.**

Fuel check valves are installed in fuel lines. They allow fuel to flow in only one direction and prevent lines running dry, for example.

#### ORDER INFORMATION

7.20235.01.0	Ø 6 mm
7.20235.02.0	Ø 8 mm
7.20235.03.0	Ø 10 mm
7.20235.04.0	Ø 12 mm


#### PRODUCT DATA

- Length: 60 mm
- Width: 22 mm
- Housing: Aluminium
- The non-return valves are suitable for all standardised fuels in motor vehicles.
- An arrow on the housing shows the direction of flow.

Take care not to use material combinations that can lead to corrosion or contact corrosion when used with aluminium, e.g. salt water or galvanised surfaces.



Fuel check valves 6 – 12 mm

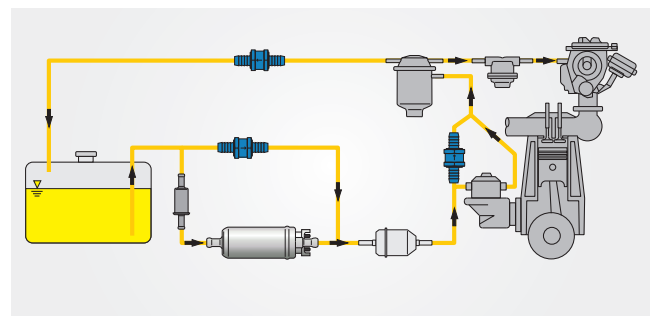

Application example: Carburettor engine with connectible supplementary electrical pump

All content including pictures and diagrams is subject to change. For assignment and replacement, refer to the current catalogues or systems based on TecAlliance.

\* The reference numbers given are for comparison purposes only and must not be used on invoices to the consumer.